

FIXTURE TYPE: _____

PROJECT NAME: _____

BRONZELITE PTLA119 LED AREA/WALKWAY SPECIFICATION SHEET



Available in cast aluminum, Mushrooms are perfect path lights for illuminating walkways and other pedestrian areas. LED and T-3 halogen sources provide even illumination in a compact, durable, beautiful luminaire.

UL Listed for **both outdoor and indoor use, cUL outdoor only**. Cool external temperatures - **all below 43°C!** - so the luminaire is **cool to the touch, including the lens**. Perfect for high pedestrian traffic and plant life applications. Exceeds European Standard EN 563 for both 1 second (74°C for coated metal, 80°C for glass) and 4 seconds (61°C for coated metal, 70°C for glass) of contact.

model PTLA119 LED

SPECIFICATIONS

HOUSING: Die cast aluminum (copper free) roof and lamp holder.

FASTENERS: Captive, stainless steel, tamper resistant.

GASKET: High-temperature silicone.

LEDs: Type III Luxeon® white high brightness (HB) LEDs. Deliver 70% lumen maintenance at 50,000 hours. Cool white (5500K nominal).

ELECTRICAL: 9.3 total watts. Integral electronic LED driver with integral surge protector. Input voltage range of 10.8-17.5 VAC/60Hz.

Powered by Advance™: Integral Advance™ electronic LED driver with integral surge protector. UL Class 2. -40°C/F minimum starting temperature. 12VAC/60Hz luminaire, requires remote magnetic transformer.

WIRING: Prewired with a 3' pigtail and a quick connector for easy hook-up to the supply cable.

FINISH: Thermoset polyester powdercoat available in Dark Bronze (DB) and Black (BLK). Verde (VRD) finish is hand-rubbed over a black thermoset polyester powdercoat.

WARRANTY: 3 year limited warranty.

CERTIFICATION: UL Listed to U.S. safety standards for wet locations (outdoors) and for indoors. cUL Listed to Canadian safety standards for wet locations (outdoors).

IP66: Dust-tight and sealed against direct jets of water.


CCT, nom.	Input Voltage Range	Input Draw, max.	Power Consumption	Luminaire Efficacy*	Total Lumens*	Starting Temp., min.
5500K	10.8-17.5VAC	1.2A	9.3W	16.4LPW	153	-40°C/F

*Efficacy and Total Lumens include losses due to driver, collimating optics and/or lens/diffuser.

FIXTURE TYPE: _____

PROJECT NAME: _____

DIMENSIONS

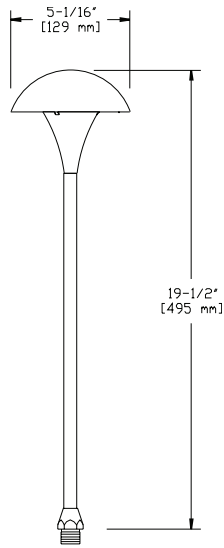

Recommended Spacing - PTLA119D-8'

Volt/Lamp	Horizontal footcandles						
	1'	2'	3'	4'	5'	6'	7'
12V,9.3w LED	5.0	1.0	0.5	0.2	0.1	0.05	0.01


ORDERING LOGIC - PTLA119 LED

DB=Dark Bronze
 BLK=Black
 VRD=Verde

Wattage/Lamp	Model No.	Finish
Cool White LED	PTLA119D	()

Note: LED's included.

Note: Requires remote magnetic (60Hz) transformer.



PROJECT NOTES

Bronzelite® Sure to endure®

APPROVAL

Note: Bronzelite reserves the right to modify the above details to reflect changes in the cost of materials &/or production &/or design without prior notice.

BRONZELITE - GENLYTE GROUP LLC • 100 Craftway • Littlestown, PA 17340 • Ph. (800) 273-1569 • Fax (717) 359-9545 • www.bronzelite.com